
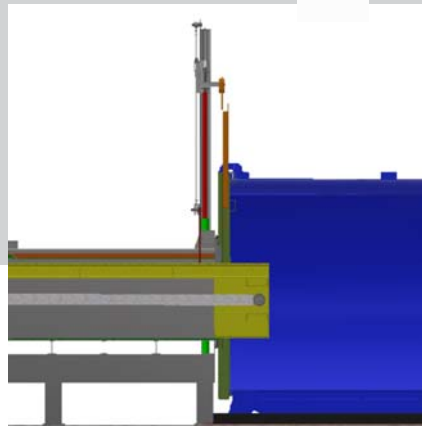
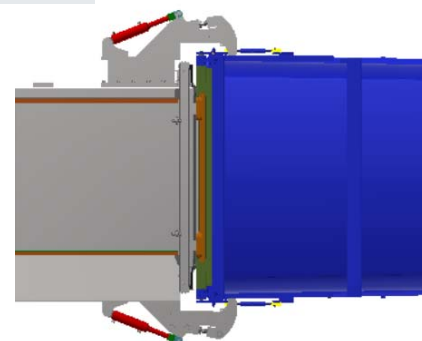


PRE-PAC PRO

SMART REFUSE COMPACTOR HEAD

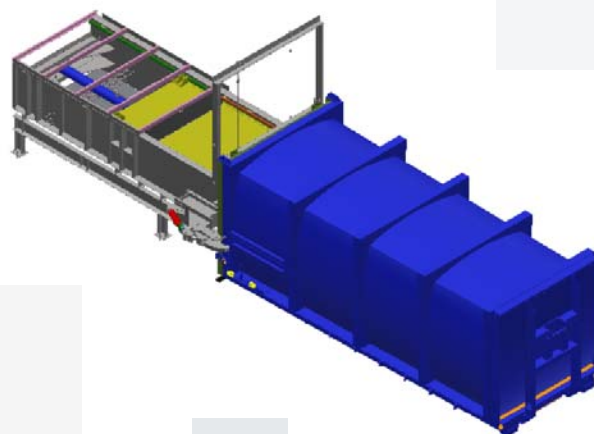

Refuse Compactor Technical Specifications

Model	Stationary Compactor Head
Min. Capacity (m3)	4.5
Max. Capacity (m3)	35
Self-weight (kg) (w/o bin lifter)	2500
Overall Length, L (mm)	2400
Overall Height, H1 (mm) (w/o bin lifter)	1650
Overall Height, H2 (mm) (w/ bin lifter)	2250
Overall Width, W (mm) (w/o bin lifter)	2400
Discharge Tray Height, H1 (mm)	N/A
Material Specification	
Bottom Plate Thickness (mm)	6
Side Plate Thickness (mm)	4.5
Packer Plate Thickness (mm)	9
Min. Compaction Cycle Time (s)	35
Max. Throughput (m3/hr)	190
Operating Hydraulic Pressure (bar)	150
Bin Lifting Cycle (s)	35
Electric Motor (kW)	7.5 to 11.5 VFD, Class F Insulation
Controller System	
Smart System	
Power Supply	415V, 3PH, 50Hz, 16A
Power Pack and Control	External / Build-in
Flushing System	Internal and Discharge Area
Smoke & Gas Detector	N/A
Fire Alarm	Incorporated
Deodorizer	2000mg/hour
Type of Collection Vehicle	Hooklift Truck
Compaction Ratio	3 : 1